


PEUGEOT 504

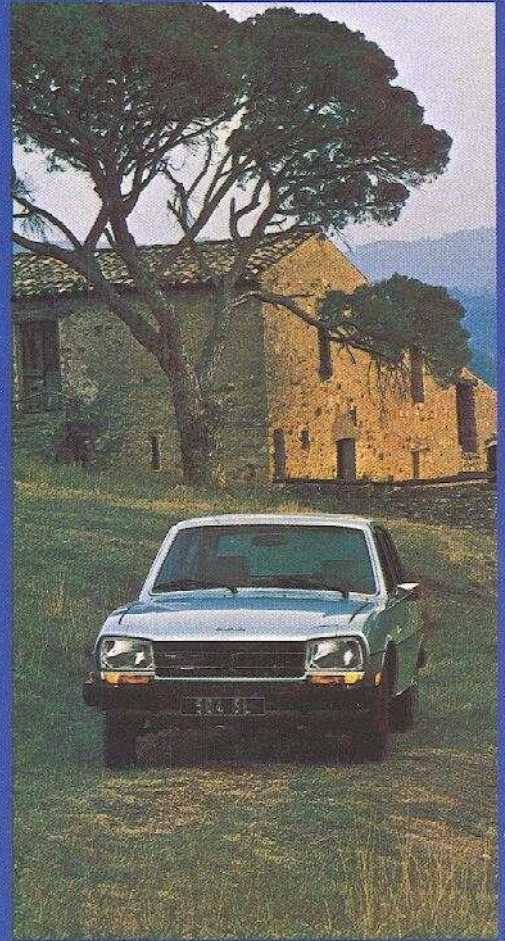

PEUGEOT

PEUGEOT 504

Specifications

SEDANS

One piece all steel bodyshell with electrophoretic anti-corrosion treatment—5 seats—Overall length: 4,62 m—Overall width: 1,69 m—Height empty/laden: 1,46/1,38 m—Wheelbase: 2,74 m—Total trunk capacity: 400 dm³—Fuel tank capacity: 70 l—Curb weight: 1340 kg—SLD:1360 kg—Maximum towing capacity: 1300 kg.

Body

One piece all steel bodyshell with electrophoretic anti-corrosion treatment—5 seats—Overall length: 4,93 m—Overall width: 1,69 m—Height empty/laden: 1,55/1,45 m—Wheelbase: 2,90 m—Useful load space: 1110 to 1820 dm³—Useful floor length: 1,43 to 1,93 m—Fuel tank capacity: 60 l—Curb weight: SW gas 1430 kg—SW Diesel 1460 kg—Maximum towing capacity: 1500 kg.

STATION WAGONS

Mechanical

Diaphragm clutch, hydraulically operated ball thrust bearing—4-speed synchromesh and reverse gearbox—Optional ZF automatic gearbox with hydrokinetic torque converter—Hypoid rear axle (floating and homokinetic tripod drive shaft joints for wheels on SL and SLD)—Suspension by coil springs and double acting telescopic Peugeot shock absorbers—Anti-roll bars front and rear—Independent 4-wheel suspension on SL and SLD—Independent suspension on front wheels on SW—Michelin radial tires 175 SR 14 on SL and SLD—185 ZX 14 on SW—Spare wheel under trunk—Rack and pinion steering—Power assisted steering—Disc brakes on 4 wheels on SL and SLD—Disc brakes at the front, drums at the rear on SW—Mastervac power assisted braking—Dual circuit with compensator—12 volt electrical equipment—Three phase 750 W alternator.

Engine

GASOLINE

4 cylinder in line oversquare
Inclined at 45°
5-bearing crankshaft
Electro-magnetic cooling fan
Electronic ignition
Twin choke carburetor
Bore/stroke: 88 X 81
Capacity:1971 cc
Compression ratio: 8,0/1
Max hp DIN: 89 at 5200 rpm
Max torque: DIN 15,6 mkg at 3000 rpm
Maximum speed: 164 km/h

DIESEL

4 cylinder in line oversquare
Inclined at 20°
5-bearing crankshaft
Electro-magnetic cooling fan
XD2 bore/stroke 94 x 83
Capacity: 2304 cc
Compression ratio: 22,2/1
Maximum hp DIN 70 at 4500 rpm
Maximum torque DIN 13,4 mkg at 2000 rpm
Maximum speed: 141 km/h

Standard Equipment	SL	SLD	SW Gas	SW Diesel
Front and rear carpeting	X	X	X	X
Front and rear door armrests	X	X	X	X
Fold-down central rear armrest	X	X		
Fully reclining front seats	X	X	X	X
Front headrests	X	X	X	X
Illuminated heater/ventilator controls	X	X	X	X
Variable speed heater/ventilator fan	X	X	X	X
Inertia reel front and rear seat belts	X	X	X	X
Curved side windows	X	X	X	X
Rear window defroster	X	X	X	X
Electrically operated front windows	X	X		
Glove compartment with lock and light	X	X	X	X
Cigarette-lighter	X	X	X	X
Electric windshield washers	X	X	X	X

Standard Equipment	SL	SLD	SW Gas	SW Diesel
2-speed windshield wipers	X	X	X	X
Thermo-voltmeter	X	X	X	X
Water temperature gauge	X	X	X	X
Handbrake-on warning light	X	X	X	X
Low brake fluid warning light	X	X	X	X
Brake pad wear warning light	X	X	X	X
Electric clock	X	X	X	X
Trip mileage	X	X	X	X
Tachometer	X		X	
Trunk light	X	X	X	X
Vanity mirror on passenger side	X	X	X	X
Day/night rearview mirror	X	X	X	X
Childproof locks on rear doors	X	X	X	X
Back-up lights	X	X	X	X
Power-steering	X	X	X	X
Sliding roof	X	X		
Leatherette upholstery	X	X	X	X
Tinted glass all around	X	X	X	X

Optional Equipment

	SL-SLD	STATION WAGONS
Metallic paint	X	X
2-stage high-gloss metallic paint	X	
Air conditioning	X	X
Roof rack		X
Automatic transmission	X	X

Characteristics and equipment are subject to change without prior notice.